


Data sheet

SRF 125 Multi -cavity wall type-2.5 m

Cavity walls type



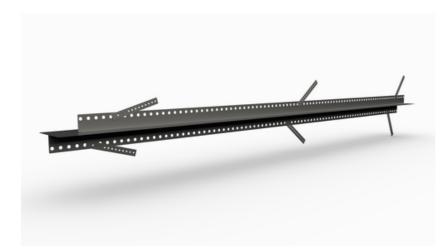

Show product



Product video in further languages



Seite 1 von 4

QUELLBÄNDER • FUGENBLECHE • INJEKTIONSSCHLÄUCHE I BAUCHEMIE • DRUCKWASSERDICHTE HAUSEINFÜHRUNGEN • BLITZSCHUTZ • SCHALUNGSZUBEHÖR

MASTERTEC GmbH & Co. KG Gewerbegebiet Unterhaid Im Maintal 13 D-96173 Oberhaid Ust.-Id.Nr.: DE 812533130 Tel.: +49 (0) 9503 5047-0 Fax: +49 (0) 9503 5047-20 info@Mastertec.eu www.Mastertec.eu EORI-Nr.: DE 4774124

Kommanditgesellschaft: HRA 9888, Sitz Oberhaid Komplementär: BBV Bau-Vertriebs-Verwaltungs GmbH, HRB 3636, Sitz Oberhaid Amtsgericht Bamberg Geschäftsführer: Rainer Kropfelder Dipl.-Kffr. Gabriele Kropfelder Felix Kropfelder Jakob Kropfelder, B.Sc.



article group:215 - SRF (alle Typen)GTIN:4251689511721customs tariff number:73269098packing unit:pcsales quantity unit:2.5 mweight per:pc = 4.6 kgmaterial:St 37, galvanizedspecial coating: polymer resin fabric-reinforcedcolour:blacklength of joint sheet metal:2.50 mheight of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness:Approx. 0.15 mmcoating:total thickness:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2suitable for zones withYes
customs tariff number:73269098packing unit:pcsales quantity unit:2.5 mweight per:pc = 4.6 kgmaterial:St 37, galvanizedspecial coating: polymer resin fabric-reinforcedcolour:blacklength of joint sheet metal:2.50 mheight of joint sheet metal:160 mmlength of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:total thickness:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2MFPA Leipzigsuitable for zones withYesYes
packing unit:pcsales quantity unit:2.5 mweight per:pc = 4.6 kgmaterial:St 37, galvanizedspecial coating: polymer resin fabric-reinforcedcolour:blacklength of joint sheet metal:2.50 mheight of joint sheet metal:160 mmlength of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:total thickness:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2MFPA Leipzigsuitable for zones withYesYes
sales quantity unit: 2.5 m weight per: pc = 4.6 kg material: St 37, galvanized special coating: polymer resin fabric-reinforced colour: black length of joint sheet metal: 2.50 m height of joint sheet metal: 160 mm length of support rails: 2.00 m width of support rails: 30 mm each thickness of joint sheet Approx. 0.6 mm metal: max. wall thickness: cavity walls up to 400 mm thickness of special thickness: cavity walls up to 400 mm thickness: Approx. 0.15 mm coating: total thickness: test certificate / approvals: Test report PB 5.1/14-425-2 MFPA Leipzig suitable for zones with
weight per:pc = 4.6 kgmaterial:St 37, galvanizedspecial coating: polymer resin fabric-reinforcedcolour:blacklength of joint sheet metal:2.50 mheight of joint sheet metal:160 mmlength of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:total thickness:test certificate / approvals:Test report PB 5.1/14-425-2MFPA Leipzigsuitable for zones withYes
material: St 37, galvanized special coating: polymer resin fabric-reinforced colour: black length of joint sheet metal: 2.50 m height of joint sheet metal: 160 mm length of support rails: 2.00 m width of support rails: 30 mm each thickness of joint sheet Approx. 0.6 mm metal: max. wall thickness: cavity walls up to 400 mm thickness of special Approx. 0.15 mm coating: total thickness: Approx. 0.9 mm test certificate / approvals: Test report PB 5.1/14-425-2 MFPA Leipzig suitable for zones with
special coating: polymer resin fabric-reinforced colour: black length of joint sheet metal: 2.50 m height of joint sheet metal: 160 mm length of support rails: 2.00 m width of support rails: 30 mm each thickness of joint sheet Approx. 0.6 mm metal: max. wall thickness: cavity walls up to 400 mm thickness of special Approx. 0.15 mm coating: total thickness: Approx. 0.9 mm test certificate / approvals: Test report PB 5.1/14-425-2 MFPA Leipzig suitable for zones with Yes
colour:blacklength of joint sheet metal:2.50 mheight of joint sheet metal:160 mmlength of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:total thickness:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2MFPA Leipzigsuitable for zones withYes
length of joint sheet metal:2.50 mheight of joint sheet metal:160 mmlength of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:total thickness:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2MFPA LeipzigSuitable for zones withYes
bit of joint sheet metal:160 mmlength of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:coating:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2suitable for zones withYes
length of support rails:2.00 mwidth of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:coating:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2MFPA Leipzigsuitable for zones withYes
width of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:coating:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2MFPA Leipzigsuitable for zones withYes
width of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:
width of support rails:30 mm eachthickness of joint sheetApprox. 0.6 mmmetal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:coating:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2MFPA Leipzigsuitable for zones withYes
thickness of joint sheet metal:Approx. 0.6 mmmax. wall thickness:cavity walls up to 400 mmthickness of special coating:Approx. 0.15 mmtotal thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2 MFPA Leipzigsuitable for zones withYes
metal:max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:coating:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2 MFPA Leipzigsuitable for zones withYes
max. wall thickness:cavity walls up to 400 mmthickness of specialApprox. 0.15 mmcoating:total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2 MFPA Leipzigsuitable for zones withYes
thickness of special coating:Approx. 0.15 mmtotal thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2 MFPA Leipzigsuitable for zones withYes
total thickness:Approx. 0.9 mmtest certificate / approvals:Test report PB 5.1/14-425-2 MFPA Leipzigsuitable for zones withYes
test certificate / approvals: Test report PB 5.1/14-425-2 MFPA Leipzig suitable for zones with Yes
MFPA Leipzig suitable for zones with Yes
suitable for zones with Yes
frequently varying water
levels:
corresponds to: Utility class A for the wear classes 1 and
2 in accordance with the WU guideline
Substances according to No
the SVHC list contained or
proportional weight ≥0.1%::

Seite 2 von 4

QUELLBÄNDER • FUGENBLECHE • INJEKTIONSSCHLÄUCHE I BAUCHEMIE • DRUCKWASSERDICHTE HAUSEINFÜHRUNGEN • BLITZSCHUTZ • SCHALUNGSZUBEHÖR

MASTERTEC GmbH & Co. KG Gewerbegebiet Unterhaid Im Maintal 13 D-96173 Oberhaid Ust.-Id.Nr.: DE 812533130 Tel.: +49 (0) 9503 5047-0 Fax: +49 (0) 9503 5047-20 info@Mastertec.eu www.Mastertec.eu EORI-Nr.: DE 4774124 Kommanditgesellschaft: HRA 9888, Sitz Oberhaid Komplementär: BBV Bau-Vertriebs-Verwaltungs GmbH, HRB 3636, Sitz Oberhaid Amtsgericht Bamberg

Geschäftsführer: Rainer Kropfelder Dipl.-Kffr. Gabriele Kropfelder Felix Kropfelder Jakob Kropfelder, B.Sc.



conform to REACH	Yes
Guideline:	
thermal scope of	- 20°C to + 90°C
application:	
waterpressuretightness:	Up to max. 6 bar (60 m water column)
storage:	Store in undamaged and unopened
	original packaging in a dry place out of direct sunlight.
disposal:	Can be disposed of at municipal waste landfill sites,
	taking into account the local waste disposal regulations.

Seite 3 von 4

QUELLBÄNDER • FUGENBLECHE • INJEKTIONSSCHLÄUCHE I BAUCHEMIE • DRUCKWASSERDICHTE HAUSEINFÜHRUNGEN • BLITZSCHUTZ • SCHALUNGSZUBEHÖR

MASTERTEC GmbH & Co. KG Gewerbegebiet Unterhaid Im Maintal 13 D-96173 Oberhaid Ust.-Id.Nr.: DE 812533130 Tel.: +49 (0) 9503 5047-0 Fax: +49 (0) 9503 5047-20 info@Mastertec.eu www.Mastertec.eu EORI-Nr.: DE 4774124

Kommanditgesellschaft: HRA 9888, Sitz Oberhaid Komplementär: BBV Bau-Vertriebs-Verwaltungs GmbH, HRB 3636, Sitz Oberhaid Amtsgericht Bamberg Geschäftsführer: Rainer Kropfelder Dipl.-Kffr. Gabriele Kropfelder Felix Kropfelder Jakob Kropfelder, B.Sc.



Basis

All dimensions and information in this data sheet reflect the results of the laboratory tests that have been carried out. Deviations from the values determined by us under laboratory conditions are possible due to environmental and operating conditions beyond our control. The data in this data sheet only applies for the product delivered by us. The product data corresponds only to the specifications in Germany. Possible country-specific deviations are not taken into account here.

Indication of law

The technical information reflects our current knowledge of SRF 125 Multi -cavity wall type-2.5 m. It is intended only as information for users. As we do not know the envisaged applications and processing conditions, it is the responsibility of the user to carefully check that the product is suitable for the intended purposes. Due to the different components at the installation site and the working conditions in place there, MASTERTEC cannot provide any guarantee whatsoever for the result of the work. Claims arising from any legal relationship can only be recognised in the event of wilful intent or gross negligence, irrespective of the statements made here or advice provided verbally. In this case the user must prove that he has provided MASTERTEC in writing with all the information required to correctly assess the installation situation in good time. Subject to necessary product specifications or further developments. By providing this information MASTERTEC does not intend to infringe third party rights. The latest data sheet in each case applies. Our corresponding terms and conditions of sale and delivery apply.

The previous data sheets are no longer valid

Print date 18.05.2024 , last modified 03.03.2023

Seite 4 von 4

QUELLBÄNDER • FUGENBLECHE • INJEKTIONSSCHLÄUCHE I BAUCHEMIE • DRUCKWASSERDICHTE HAUSEINFÜHRUNGEN • BLITZSCHUTZ • SCHALUNGSZUBEHÖR

MASTERTEC GmbH & Co. KG Gewerbegebiet Unterhaid Im Maintal 13 D-96173 Oberhaid Ust.-Id.Nr.: DE 812533130 Tel.: +49 (0) 9503 5047-0 Fax: +49 (0) 9503 5047-20 info@Mastertec.eu www.Mastertec.eu EORI-Nr.: DE 4774124 Kommanditgesellschaft: HRA 9888, Sitz Oberhaid Komplementär: BBV Bau-Vertriebs-Verwaltungs GmbH, HRB 3636, Sitz Oberhaid Amtsgericht Bamberg **Geschäftsführer:** Rainer Kropfelder Dipl.-Kffr. Gabriele Kropfelder Felix Kropfelder Jakob Kropfelder, B.Sc.