


## Data sheet

### SRF 125 Multi-in-situ concrete wall type 3.0 m

Crack-inducing prof, for in-situ concrete walls

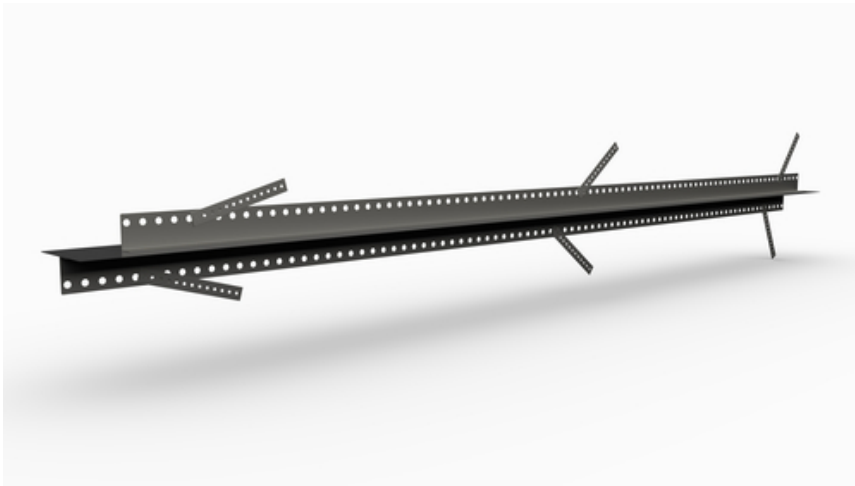

[Show product](#)





article number:	070279
article group:	215 - SRF (alle Typen)
GTIN:	4251689505973
customs tariff number:	73269098
packing unit:	pc
sales quantity unit:	3 m
material:	St 37, galvanized special coating: polymer resin fabric-reinforced
colour:	black
length joint sheet metal:	3,0 m
height joint sheet metal:	160 mm
length of support rails:	2,5 m
max. wall thickness:	365 mm
test certificate / approvals:	Test report PB 5.1/14-425-2 MFPA Leipzig
corresponds to:	Utility class A for the wear classes 1 and 2 in accordance with the WU guideline
suitable for zones with frequently varying water levels:	yes
conform to REACH guideline:	yes
Substances according to the SVHC list contained or proportional weight $\geq 0.1\%$ :	No
thermal scope of application:	- 20°C to + 90°C
waterpressuretightness:	Up to max. 6 bar (60 m water column)
storage:	Store in undamaged and unopened original packaging in a dry place out of direct sunlight.
disposal:	Can be disposed of at municipal waste landfill sites, taking into account the local waste disposal regulations.

## Basis

All dimensions and information in this data sheet reflect the results of the laboratory tests that have been carried out. Deviations from the values determined by us under laboratory conditions are possible due to environmental and operating conditions beyond our control. The data in this data sheet only applies for the product delivered by us. The product data corresponds only to the specifications in Germany. Possible country-specific deviations are not taken into account here.

## Lifetime

The useful life of buildings is designed for 50 years, and so are the products that are installed. However, this can be shortened by external influences. The expected lifetime of our products depends to a large extent on the installation location (e.g. buried installation, damp environment, offshore, etc.). In addition, there are external influences such as exposure to chemical influences (e.g. acids, aggressive media, aqueous solutions, industrial waste water, oils, etc.) and ambient temperatures / operating temperatures. Ultimately, no generally valid statement can be made about the guaranteed service life of our MASTERTEC products, as this depends on many parameters (use, environmental influences, installation requirements, safety regulations, etc.). To ensure safe operation, we recommend continuous testing of the product, as part of an operating and maintenance manual to be prepared by the customer in accordance with the safety requirements.

## Indication of law

The technical information reflects our current knowledge of the product SRF 125 Multi-in-situ concrete wall type 3.0 m. It is intended only as information for users. As we do not know the envisaged applications and processing conditions, it is the responsibility of the user to carefully check that the product is suitable for the intended purposes. Due to the different components at the installation site and the working conditions in place there, MASTERTEC cannot provide any guarantee whatsoever for the result of the work. Claims arising from any legal relationship can only be recognised in the event of wilful intent or gross negligence, irrespective of the statements made here or advice provided verbally. In this case the user must prove that he has provided MASTERTEC in writing with all the information required to correctly assess the installation situation in good time. Subject to necessary product



specifications or further developments. By providing this information MASTERTEC does not intend to infringe third party rights. The latest data sheet in each case applies. Our corresponding terms and conditions of sale and delivery apply.

## **The previous data sheets are no longer valid**

Print date 22.07.2024 , last modified 12.03.2024