

Navodila za namestitev

STOPPER mini 22 (21,5-23 mm)

Vodotesni tesnilni čepi za debeline sten iz vlaknenega cementa ali plastike ID 21,5 - do 23 mm

številka izdelka: 046150



[Prikaži izdelek](#)



Videoposnetek izdelka v
drugih jezikih



Navodila za namestitev:




Required tooling:

Hard rubber mallet: 1500 - 2000 g

Cleaning brush for tube 21.5 - 26 mm (Art.-Nr.: 046170)

Drive-in aid (Art.-Nr.: 046180)

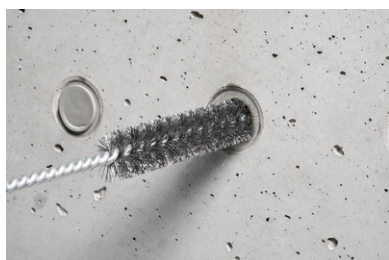

Soiled distance tubes must be thoroughly cleaned before installing the STOPPER.

The entire installation area must be properly cleaned as otherwise it will not be possible to drive in the STOPPER to its final depth.



Whether using cones or lip seals, the **STOPPER mini 22** can be used as the outer closure of the distance tube.



The **STOPPER mini 22** is installed by driving it in with a hard rubber mallet (weight 1500 - 2000 g) using reasonable force.



If a lip is used, the **STOPPER mini 22** must be driven in so that it is flush.

The small surrounding edge of the **STOPPER mini 22** must lie flat against the surface of the concrete.

!! The STOPPERS must always be driven in at both ends of the distance tubel!!



If used with a tapered cone, the last bit of the **STOPPER mini 22** must be driven into position using a drive-in aid.



The **STOPPER mini 22** is then driven in so far that the small surrounding edge is resting against the inner concrete surface.

!! The STOPPERS must always be driven in at both ends of the distance tubel!!

When driving in the second **STOPPER mini 22** on the other end of the tube, it may appear that it is not possible to drive it in completely. This is due to compressed air trapped between the two STOPPERS.

If this situation occurs, simply wait and give the air time to escape before continuing to drive in the STOPPER into its final position.



MASTERTEC

SPECIAL ARTICLES FOR REINFORCED CONCRETE CONSTRUCTION

Status: 23.03.2022

Seite 4 von 6

HYDROPHILIC WATERSTOP · JOINT SHEET METAL · INJECTION HOSES | CONSTRUCTION CHEMISTRY · SERVICE DUCTS · LIGHTNING PROTECTION · FORMWORK ACCESSORIES

MASTERTEC GmbH & Co. KG
Gewerbegebiet Unterhaid
Im Maintal 13
D-96173 Oberhaid
Ust.-Id.Nr.: DE 812533130

Tel.: +49 (0) 9503 5047-0
Mail: info@mastertec.eu
www.mastertec.eu

EORI-Nr.: DE 4774124

Kommanditgesellschaft:
HRA 9888, Sitz Oberhaid
Komplementär: BBV Bau-
Vertriebs-Verwaltungs GmbH,
HRB 3636 Sitz Oberhaid
Amtsgericht Bamberg

Managing directors:
Rainer Kropfelder
Dipl.-Kffr. Gabriele Kropfelder
Felix Kropfelder, B. Eng.
Jakob Kropfelder, B. Sc.

Bank details:
Sparkasse Bamberg
IBAN: DE24 7705 0000 0810 3458 84
BIC: BYLADEM1 SKB

Dodatki

Ročna krtača za
čiščenje vpenjalnih točk

...

Pomoč za udarce
STOPPER

...

Osnova

Vse dimenzije in informacije v tem podatkovnem listu se nanašajo na rezultate opravljenih laboratorijskih testov. Odstopanja od vrednosti, ki smo jih določili v laboratorijskih pogojih, so mogoča zaradi okoljskih in obratovalnih pogojev, na katere nimamo vpliva. Podatki v tem podatkovnem listu veljajo samo za izdelek, ki smo ga dobavili. Podatki o izdelku ustrezajo samo specifikacijam v Nemčiji. Morebitna odstopanja od specifikacij v posameznih državah tukaj niso upoštevana.

Navedba prava

Tehnične informacije odražajo naše trenutno znanje oSTOPPER mini 22 (21,5-23 mm). Namenjen je le kot informacija za uporabnike. Ker ne poznamo predvidenih načinov uporabe in pogojev obdelave, mora uporabnik skrbno preveriti, ali je izdelek primeren za predvidene namene. Zaradi različnih sestavnih delov na mestu vgradnje in tamkajšnjih delovnih pogojev družba MASTERTEC ne more dati nikakršnega jamstva za rezultat dela. Zahtevki, ki izhajajo iz kakršnega koli pravnega razmerja, se lahko priznajo le v primeru namernega dejanja ali hude malomarnosti, ne glede na tukaj navedene izjave ali ustne nasvete. V tem primeru mora uporabnik dokazati, da je podjetju MASTERTEC pisno posredoval vse informacije, ki so potrebne za pravilno in pravočasno oceno stanja vgradnje. V skladu s potrebnimi specifikacijami izdelka ali nadaljnjim razvojem. Z zagotavljanjem teh informacij družba MASTERTEC ne namerava kršiti pravic tretjih oseb. V vsakem primeru velja najnovejši podatkovni list. Veljajo naši ustrezni prodajni in dobavni pogoji.

Prejšnji podatkovni listi niso več veljavni

Natisni datum 18.07.2024